

---

# Cross-Colors Mingles

---

Porcelain Stone®



---

# Cross-Colors Mingles

---

## Porcelain Stone<sup>®</sup>

A remarkably classic tile. Quintessential in its color palette, texture, finishes and complementary mingles, Crossville Cross-Colors Mingles is the tried and true tile for designers. Striking in its simplicity, comforting in its consistency, Cross-Colors Mingles provide the perfect complement to any space.




**A850** ▶ Graphite 12 x 12 UPS




# Color Palette


## Available Colors

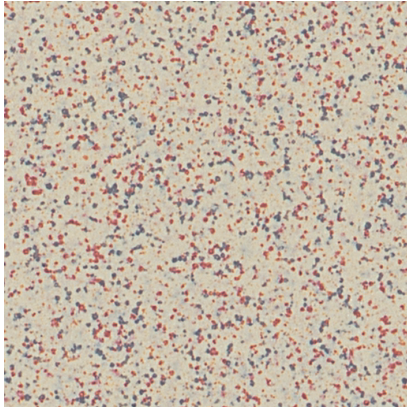

**A233** ▶ Sand Bisque

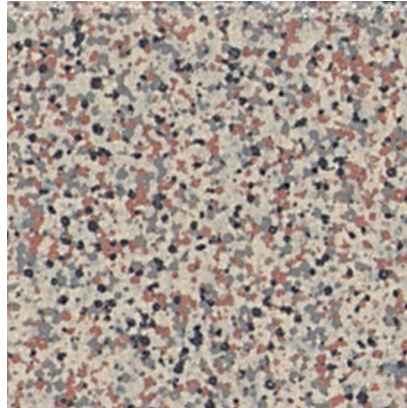


**A675** ▶ Stonehenge

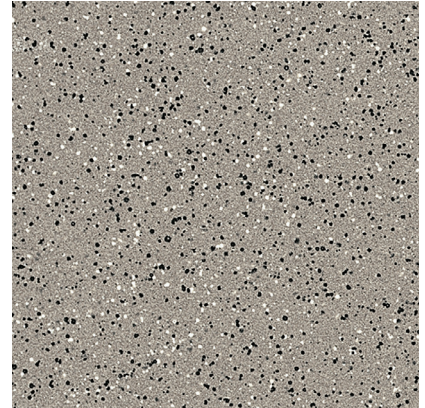


**R001** ▶ Grey Mingle




**A750** ▶ Brown Tweed

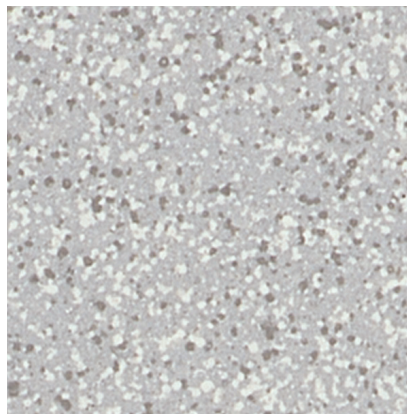


**A825** ▶ Mercury

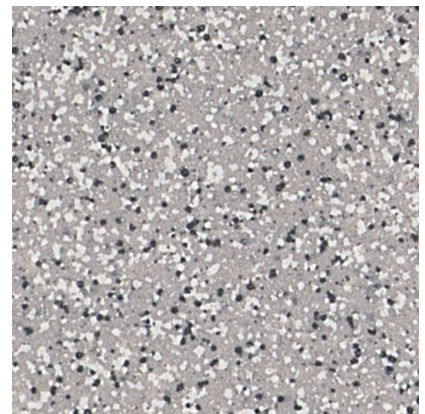


**A900** ▶ Mica

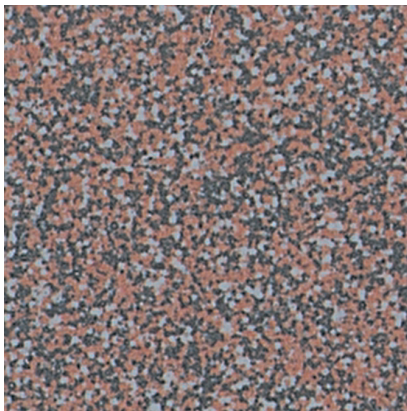

**A790** ▶ Burgundy Smoke

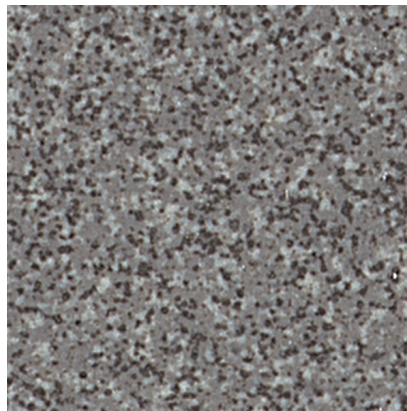

**A850** ▶ Graphite

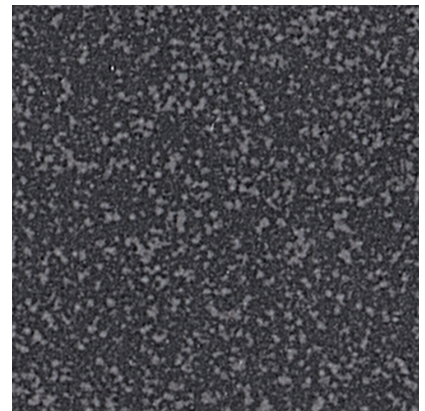

**A880** ▶ Onyx



A750 ▶ Brown Tweed 12 x 12 UPS

# Specifications

## Sizes



## Sizes & Finishes

### Field Tile

Nominal (in)	Actual (in)	Thickness (in)	Finish
6 x 6*	5-3/4 x 5-3/4	5/16	UPS/PO/CS
8 x 8	7-3/4 x 7-3/4	5/16	UPS/CS/CTS
12 x 12	11-3/4 x 11-3/4	5/16	UPS/PO/CS

Crossville® recommends a grout joint of 3/16 to 1/4 inch.

\*Note: The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance.

6 x 6 CS and PO are not stocked and require an extra two to eight weeks for delivery depending on Crossville's production schedule. Actual measurements stated in inches indicate tile is calibrated (non-rectified).

Actual measurements stated in mm indicate tile is rectified.

## Product Performance

Breaking Strength	350-420 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.10%	ASTM C373
Scratch Hardness		Mohs Scale
UPS, CS, CTS	6	
PO	5	

## Wet Dynamic Coefficient of Friction Range

Unpolished (UPS)	0.50 - 0.60	AcuTest <sup>sm</sup>
Cross-Slate (CS)	0.50 - 0.60	AcuTest <sup>sm</sup>
Cross-Tread (CTS)*	0.50 - 0.60	AcuTest <sup>sm</sup>
Polished (PO)	0.31 - 0.41	AcuTest <sup>sm</sup>

\* The increased real world traction of these types of surfaces cannot be fully realized by any current COF testing methodologies due to their exaggerated facial structure.

## Get Planked!


Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.



See website for more details and sizes.


## Shade & Texture Index

Cross-Colors Mingles has a shade variation of V1.



Differences among pieces from the same production run are minimal.

## Coordinating Trim

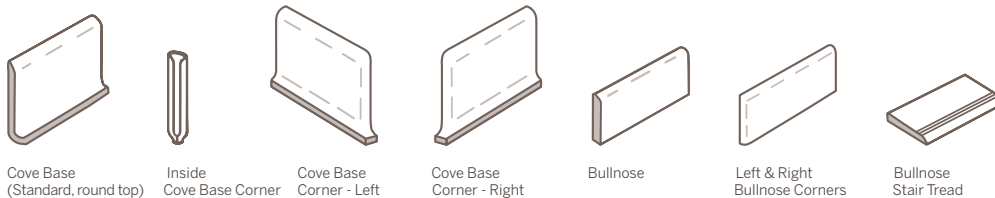

Cove Base (Standard, round top)

Inside Cove Base Corner

Cove Base Corner - Left

Cove Base Corner - Right

Bullnose

Left & Right Bullnose Corners

Bullnose Stair Tread

### Trim Program (Available in UPS finish only)

Size	6 x 8 Cove Base	1 x 6 Cove Base Corner	6 x 8 Inside & Outside Cove Base Corner	4 x 8 Bullnose	4 x 8 Left & Right Bullnose corners	4 x 8 Bullnose Stair Tread
Actual	5-7/8 x 7-3/4	1 x 5-7/8	5-7/8 x 7-3/4	3-7/8 x 7-3/4	3-7/8 x 7-3/4	3-7/8 x 7-3/4
Thickness	5/16	—	5/16	5/16	5/16	5/16 4

### Recommended Use

**Cross-Colors®** – Cross-Colors Unpolished (UPS) is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial environments. Cross-Colors (PO) is recommended for interior floors (except where standing water may occur), walls, countertops and exterior walls in both residential and commercial environments.

**Polished (PO)** – Polished Porcelain Stone® is a practical alternative to natural stone with its attractive, mirror-like finish and can be used with other surface textures to increase visual interplay and interest. Polished finish adds a look of elegance and sophistication to interior floors and interior and exterior walls. Polished finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.

**Cross-Slate® (CS)** – The Cross-Slate finish combines the rustic and textured feel of slate with the through-body color and durability of Porcelain Stone®. Through-body color, unglazed structured surface, and a variety of sizes provide a strong commercial value where enhanced traction is needed for high traffic interior and exterior spaces. Cross-Slate is recommended for interior floors and walls as well as exterior walls and exterior walking surfaces in both residential and commercial environments.

**Cross-Tread® (CTS)** – Increased slip resistance and ease of maintenance make this tile a suitable choice for wet and greasy floor areas, as well as for exterior walking surfaces. The Cross-Tread surface pattern is eye-catching, making it a great option for transitional areas and for use as an accent tile.

*Information listed here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.*

### Care and Maintenance

Regular cleaning is the best way to keep Cross-Colors tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville® products is available at CrossvilleInc.com.

### Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1- 2012. For complete details check our website at CrossvilleInc.com.

### Environmentally Conscious

Cross-Colors contains a minimum of 4% pre-consumer recycled content and is manufactured by Crossville® using proprietary processes. Crossville recycles nearly 12 million pounds of previously discarded filtrate and fired tile waste. In addition to its own fired waste recycling, Crossville also accepts and recycles reclaimed, previously installed tile through its Tile Take-Back™ program. For more information, visit CrossvilleInc.com/green.

### Hydrotect

Our porcelain tiles are available with Hydrotect. Crossville's revolutionary invisible coating harnesses the power of light, water, and oxygen to create the best defense against dirt and pollution. Whether indoors or out, floors and walls stay cleaner, providing a superior experience in any space. For complete details check our website at CrossvilleInc.com.



### Crossville® Sample Express

**Sample fulfillment & Help Line**  
Samples@CrossvilleInc.com  
1 800 221.9093

*Loose Samples for  
Architects & Designers*

### Loose Tile Samples

Sizes may vary depending on product series  
Max. of 4 large field tile per order

### Replacement Chips for PSS Rack

Max. of 5, 2 x 2 chips per color

### Standard Shipping

UPS Ground

### CrossvilleInc.com

If you want a better idea of what Crossville tile would look like in a particular room setting, simply visit our website and click on Cross-Vision. This powerful software tool allows you to visualize different types of Crossville tile. In addition, you'll find comprehensive information about Crossville's entire portfolio of products. You can also learn about the latest styles and trends from industry experts, download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at CrossvilleInc.com.

### Trade Organizations



### Environmentally Aware



# Cross-Colors Mingles

**Crossville, Inc.**

PO Box 1168  
Crossville, TN  
38557

**Phone** 931.484.2110  
**Fax** 931.456.2956  
**E-Mail** [Crossc@CrossvilleInc.com](mailto:Crossc@CrossvilleInc.com)  
**Web** [CrossvilleInc.com](http://CrossvilleInc.com)



**A850** ▶ Graphite 12 x 12 UPS

Cover: **A750** ▶ Brown Tweed 12 x 12 UPS and 6 x 8 Cove Base UPS



LIT-CCMING-18